


BH300 Holder

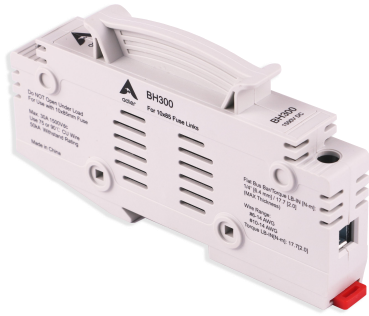

FEATURES:

These holders, in conjunction with BH300 fuse, are the effective solution to safely reference modules from reserve over current conditions.

Rated for up to above 30 Amps and 1500VDC, this holder, could supply a cost-effective solution to protect circuit overload, gPV

DESCRIPTION:

The BH300 applies to 10x85mm fuse.

SPECIFICATIONS:

- Rated voltage: 1500V DC
- Rated current: 0~30A
- Breaking Capacity: 50kA@1500VDC
- Manufacturing Standards: UL4248-18-2
- Material Flammability: UL 94-V0 (PBT)/ UL91-V2 (PA6)
- Wire Range: 2.0mm²~13.3mm²
- UL file: pending

DIMENSIONS: mm

